



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

# SAR Evaluation Test Report

For

**M5Stack Technology Co., Ltd**

**5F, Tangwei Stock Commercial Building, Youli Road, Bao'an District,  
Shenzhen, China**

**Tested Model : M5CoreS3**

Prepared By: Peng Peng *Peng Peng*

Report Number: WSCT-R&E230300103A-SAR

Report Date: 09 March 2023

Checked By: Wei Liangmei *Wei Liangmei*

Approved By: Liu Fuxin *Liu Fuxin*



Testing Laboratory: World Standardization Certification & Testing Group  
(Shenzhen) Co., Ltd.  
Building A-B, Baoshi Science & Technology Park,  
Baoshi Road, Bao'an District, Shenzhen, Guangdong,  
China  
TEL: +86-755-26996192  
FAX: +86-755-86376605







## Table of contents

|          |                                                     |           |
|----------|-----------------------------------------------------|-----------|
| <b>1</b> | <b>General information</b>                          | <b>4</b>  |
| 1.1      | Notes                                               | 4         |
| 1.2      | Application details                                 | 4         |
| 1.3      | EUT Information                                     | 5         |
| 1.4      | Test standards:                                     | 6         |
| 1.5      | RF exposure limits                                  | 7         |
| 1.6      | SAR Definition                                      | 7         |
| <b>2</b> | <b>Testing laboratory</b>                           | <b>8</b>  |
| <b>3</b> | <b>ACCREDITATIONS</b>                               | <b>8</b>  |
| <b>4</b> | <b>Test Environment</b>                             | <b>8</b>  |
| <b>5</b> | <b>Applicant and Manufacturer</b>                   | <b>8</b>  |
| <b>6</b> | <b>SAR Measurement System</b>                       | <b>9</b>  |
| 6.1      | The Measurement System                              | 9         |
| 6.2      | Robot                                               | 10        |
| 6.3      | Probe                                               | 10        |
| 6.4      | Measurement procedure                               | 11        |
| 6.5      | Description of interpolation/extrapolation scheme   | 12        |
| 6.6      | Phantom                                             | 13        |
| 6.7      | Device Holder                                       | 14        |
| 6.8      | Video Positioning System                            | 15        |
| 6.9      | Tissue simulating liquids: dielectric properties    | 16        |
| 6.10     | Tissue simulating liquids: parameters               | 16        |
| <b>7</b> | <b>System Check</b>                                 | <b>17</b> |
| 7.1      | System check procedure                              | 17        |
| 7.2      | System check results                                | 18        |
| <b>8</b> | <b>Measurement uncertainty evaluation</b>           | <b>19</b> |
| 8.1      | Measurement uncertainty evaluation for SAR test     | 19        |
| 8.2      | Measurement uncertainty evaluation for system check | 21        |



For Question,  
Please Contact with WSCT  
www.wsct-cert.com

|                 |                                                            |           |
|-----------------|------------------------------------------------------------|-----------|
| <b>9</b>        | <b>Detailed Test Results.....</b>                          | <b>23</b> |
| <b>9.1.1</b>    | <b>Results overview of Wi-Fi 2.4G .....</b>                | <b>23</b> |
| <b>9.2</b>      | <b>Multiple Transmitter Information.....</b>               | <b>23</b> |
| <b>9.3</b>      | <b>Stand-alone SAR.....</b>                                | <b>24</b> |
| <b>9.4</b>      | <b>Simultaneous SAR.....</b>                               | <b>24</b> |
| <b>10</b>       | <b>Test equipment and ancillaries used for tests .....</b> | <b>25</b> |
| <b>Annex A:</b> | <b>Photo documentation.....</b>                            | <b>26</b> |
| <b>Annex B:</b> | <b>Measurement results.....</b>                            | <b>26</b> |
| <b>Annex C:</b> | <b>Calibration reports .....</b>                           | <b>26</b> |







### Modified History

| REV.    | Modification Description    | Issued Date   |
|---------|-----------------------------|---------------|
| REV 1.0 | Initial Test Report Release | 09 March 2023 |
|         |                             |               |

## 1 General information

### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

### 1.2 Application details

Date of receipt of test item: 2023-02-23  
Start of test: 2023-02-28  
End of test: 2023-03-07







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

### 1.3 EUT Information

|                                  |                                                                                                                                                   |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:                    | M5CoreS3                                                                                                                                          |
| Model No.:                       | CoreS3                                                                                                                                            |
| Device Type:                     | <input checked="" type="checkbox"/> Engineering Sample. <input type="checkbox"/> Product Sample,<br><input type="checkbox"/> Mass Product Sample. |
| Hardware:                        | V0.2                                                                                                                                              |
| Software:                        | V0.2                                                                                                                                              |
| Battery Information:             | DC 5.0V 500mA                                                                                                                                     |
| Device Operating Configurations: |                                                                                                                                                   |
| Supported type:                  | Wi-Fi, BT                                                                                                                                         |
| Modulation mode:                 | WiFi(DBPSK, DQPSK CCK,BPSK,QPSK,16QAM,64QAM),<br>BT3.0(GFSK/π/4-DQPSK/ 8-DPSK),<br>BT 5.0(GFSK)                                                   |
| Operation frequency:             | Bluetooth: 2402 ~ 2480 MHz (TX/RX);<br>Wi-Fi: 2412~2472 MHz (TX/RX);                                                                              |
| Max. Simultaneous SAR:           | 0.07W/kg 10g Body Tissue                                                                                                                          |







#### 1.4 Test standards:

| Test Standard              | Version | Test Standard Description                                                                                                                                                                                                                                                                                                                     |
|----------------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EN 50566                   | 2017    | Product standard to demonstrate the compliance of wireless communication devices with the basic restrictions and exposure limit values related to human exposure to electromagnetic fields in the frequency range from 30 MHz to 6 GHz: hand-held and body mounted devices in close proximity to the human body                               |
| EN 62209-2:2010/AMA.1:2019 | 2019    | Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) |







## 1.5 RF exposure limits

### CE Limit

| Human Exposure                      | Uncontrolled Environment /<br>General Population | Controlled Environment /<br>Occupational |
|-------------------------------------|--------------------------------------------------|------------------------------------------|
| Spatial Peak SAR<br>(Brain/Body)    | <b>2.00 W/kg</b>                                 | 10.00 W/kg                               |
| Spatial Average SAR<br>(Whole Body) | 0.08 W/kg                                        | 0.40 W/kg                                |
| Spatial Peak SAR<br>(Limbs)         | 4.00 W/kg                                        | 20.00 W/kg                               |

The limit applied in this test report is shown in bold letters

#### Notes:

- \* The Spatial Peak value of the SAR averaged over any 1 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- \*\* The Spatial Average value of the SAR averaged over the whole body.
- \*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

## 1.6 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

- σ = conductivity of the tissue (S/m)
- ρ = mass density of the tissue (kg/m<sup>3</sup>)
- E = rms electric field strength (V/m)







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 2 Testing laboratory

|               |                                                                                                          |
|---------------|----------------------------------------------------------------------------------------------------------|
| Test Site     | World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.                                 |
| Test Location | Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China |
| Telephone     | +86-755-26996192                                                                                         |
| Fax           | +86-755-86376605                                                                                         |

## 3 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

China CNAS (The certificated registration number is L3732)

USA A2LA (Registration NO: 5768.01)

Copies of granted accreditation certificates are available for downloading from our web site,

<http://www.wsct-cert.com>

## 4 Test Environment

|                            | Required   | Actual    |
|----------------------------|------------|-----------|
| Ambient temperature:       | 18 – 25 °C | 22 ± 2 °C |
| Tissue Simulating liquid:  | 22 ± 2 °C  | 22 ± 2 °C |
| Relative humidity content: | 30 – 70 %  | 30 – 70 % |

## 5 Applicant and Manufacturer

|                       |                                                                                     |
|-----------------------|-------------------------------------------------------------------------------------|
| Applicant/Client Name | M5Stack Technology Co., Ltd                                                         |
| Applicant Address     | 5F, Tangwei Stock Commercial Building, Youli Road, Bao'an District, Shenzhen, China |
| Manufacturer Name     | M5Stack Technology Co., Ltd                                                         |
| Manufacturer Address  | 5F, Tangwei Stock Commercial Building, Youli Road, Bao'an District, Shenzhen, China |







For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

## 6 SAR Measurement System

### 6.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Device holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.







For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

## 6.2 Robot

The COMOSAR system uses the high precision robots KR 6 R900 sixx type out of the newer series from Satimo SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from Satimo is used. The KR 6 R900 sixx robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

## 6.3 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE 5 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB
- Calibration range: 300 to 2600MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°







#### 6.4 Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- **Area scan:** Measurement of the SAR distribution with a grid of 8 to 16 mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.
- **Head & Body worn operation:** The device complies with RF specifications when used near your ear or at a distance of 5 mm from your body. The 5mm distance is based on the user manual. Ensure that the device accessories, such as a device case and device holster, are not composed of metal components. Keep the device away from your body to meet the distance requirement.
- **Note:** Pursuant to the requirements of EN 50566: 2017, **M5Stack Technology Co., Ltd** states that the spacing distance of 5 mm is appropriate because **M5Stack Technology Co., Ltd** has fully advised consumers regarding the spacing needed for maintaining compliance with RF exposure guidelines. **M5Stack Technology Co., Ltd** notes that the spacing is for purposes of confirming compliance with national and/or international RF guidelines and that the spacing is not a safety requirement due to large safety factors built - in to the guidelines. The maximum SAR value is recorded at full transmission power of the device.







## 6.5 Description of interpolation/extrapolation scheme

- The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.
- An extrapolation is using to determinate this highest local SAR values.  
The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.
- An interpolation could use three staggered one-dimensional cubic splines of which measured data. The measured and extrapolated SAR values within the zoom-scan volume are interpolated to a 1 mm grid for use to determine the 1 g or 10 g peak spatial-average SAR.
- The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR average over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.







## 6.6 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



| System Material | Permittivity | Loss Tangent |
|-----------------|--------------|--------------|
| Delrin          | 3.7          | 0.005        |








For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 6.7 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

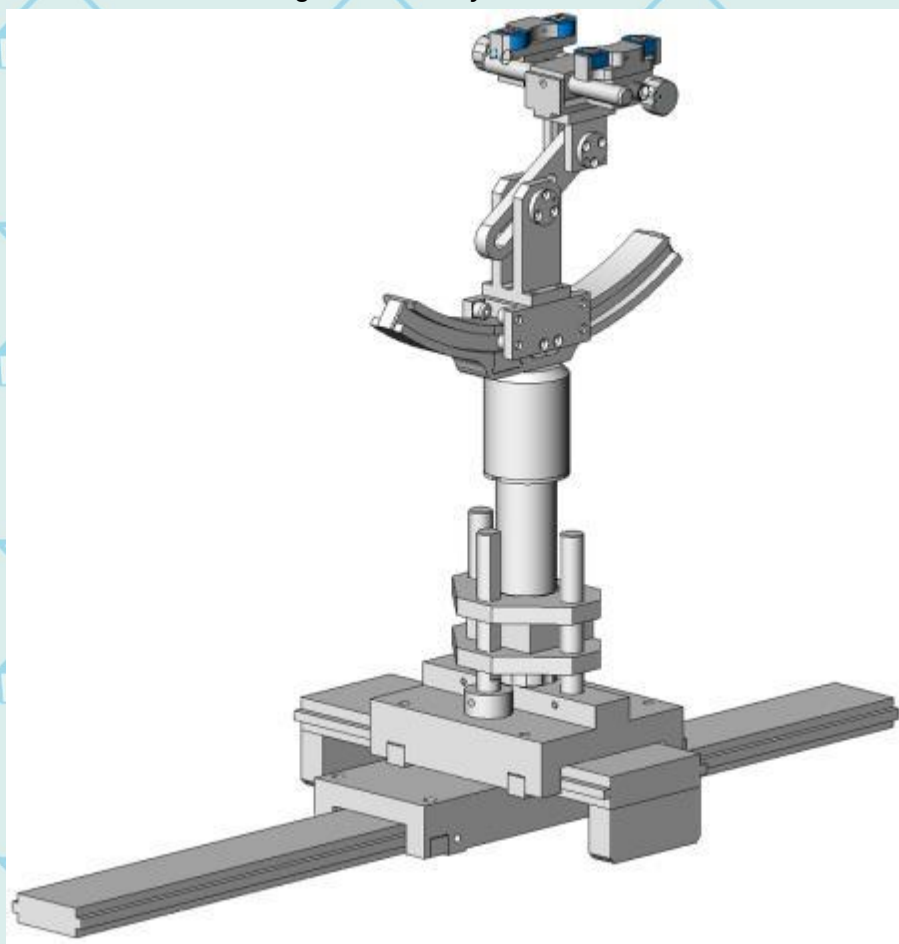

Device holder

| System Material | Permittivity | Loss Tangent |
|-----------------|--------------|--------------|
| Delrin          | 3.7          | 0.005        |







For Question,  
Please Contact with WSCT  
[www.wsct-cert.com](http://www.wsct-cert.com)

## 6.8 Video Positioning System

- The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.
- During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.
- The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 6.9 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests are marked with ☒):

| Ingredients<br>(% of weight) | Frequency (MHz) |       |       |       |       |      |        |
|------------------------------|-----------------|-------|-------|-------|-------|------|--------|
|                              | 835             | 900   | 1800  | 2000  | 2300  | 2450 | 2600   |
| frequency band               | ☐               | ☐     | ☐     | ☐     | ☐     | ☒    | ☐      |
| Tissue Type                  | Head            | Head  | Head  | Head  | Head  | Head | Head   |
| Water                        | 41.45           | 40.92 | 52.64 | 54.9  | 62.82 | 62.7 | 55.242 |
| Salt (NaCl)                  | 1.45            | 1.48  | 0.36  | 0.18  | 0.51  | 0.5  | 0.306  |
| Sugar                        | 56.0            | 56.5  | 0.0   | 0.0   | 0.0   | 0.0  | 0.0    |
| HEC                          | 1.0             | 1.0   | 0.0   | 0.0   | 0.0   | 0.0  | 0.0    |
| Bactericide                  | 0.1             | 0.1   | 0.0   | 0.0   | 0.0   | 0.0  | 0.0    |
| Triton X-100                 | 0.0             | 0.0   | 0.0   | 0.0   | 0.0   | 36.8 | 0.0    |
| DGBE                         | 0.0             | 0.0   | 47.0  | 44.92 | 36.67 | 0.0  | 44.452 |

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

## 6.10 Tissue simulating liquids: parameters

| Used Target Frequency                                         | Target Tissue          |                        | Measured Tissue |                | Liquid Temp. | Test Date  |
|---------------------------------------------------------------|------------------------|------------------------|-----------------|----------------|--------------|------------|
|                                                               | $\epsilon_r$ (+/-5%)   | $\sigma$ (S/m) (+/-5%) | $\epsilon_r$    | $\sigma$ (S/m) |              |            |
| 2450MHz Head                                                  | 39.20<br>(37.24~41.16) | 1.80<br>(1.71~1.89)    | 40.27           | 1.82           | 21.6°C       | 2023/03/07 |
| $\epsilon_r$ = Relative permittivity, $\sigma$ = Conductivity |                        |                        |                 |                |              |            |








For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 7 System Check

### 7.1 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

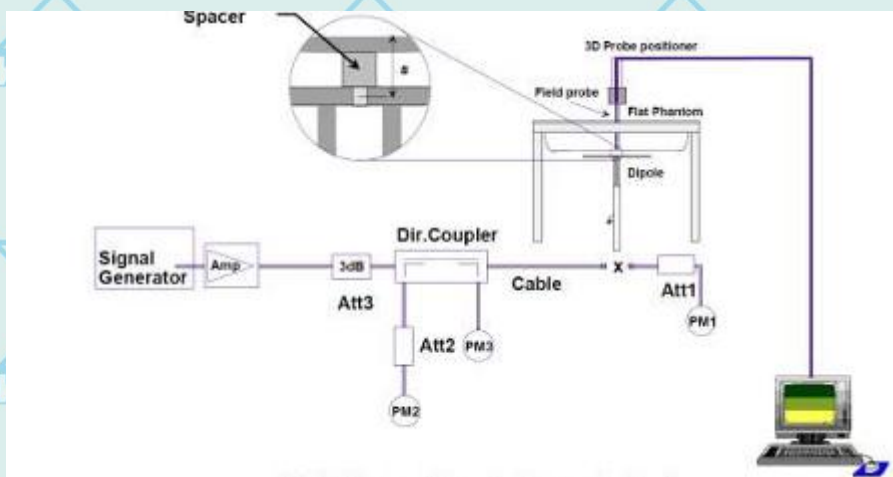





## 7.2 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

| System Check | Target SAR (1W) (+/-10%) |                        | Measured SAR (Normalized to 1W) |             | Liquid Temp. | Test Date  |
|--------------|--------------------------|------------------------|---------------------------------|-------------|--------------|------------|
|              | 1-g (mW/g)               | 10-g (mW/g)            | 1-g (mW/g)                      | 10-g (mW/g) |              |            |
| D2450V2 Head | 53.41<br>(48.06~58.75)   | 23.95<br>(21.55~26.34) | 57.820                          | 25.45       | 21.6°C       | 2023/03/07 |

Note: All SAR values are normalized to 1W forward power.







## 8 Measurement uncertainty evaluation

### 8.1 Measurement uncertainty evaluation for SAR test

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

| Measurement Uncertainty evaluation for SAR test                                |              |                |            |                        |                         |                           |                            |                |
|--------------------------------------------------------------------------------|--------------|----------------|------------|------------------------|-------------------------|---------------------------|----------------------------|----------------|
| Uncertainty Component                                                          | Tol.<br>(±%) | Prob.<br>Dist. | Div.       | C <sub>i</sub><br>(1g) | C <sub>i</sub><br>(10g) | 1g U <sub>i</sub><br>(±%) | 10g U <sub>i</sub><br>(±%) | V <sub>i</sub> |
| <b>measurement system</b>                                                      |              |                |            |                        |                         |                           |                            |                |
| Probe Calibration                                                              | 5.8          | N              | 1          | 1                      | 1                       | 5.8                       | 5.8                        | ∞              |
| Axial Isotropy                                                                 | 3.5          | R              | $\sqrt{3}$ | $(1-C_p)^{1/2}$        | $(1-C_p)^{1/2}$         | 1.43                      | 1.43                       | ∞              |
| Hemispherical Isotropy                                                         | 5.9          | R              | $\sqrt{3}$ | $\sqrt{C_p}$           | $\sqrt{C_p}$            | 2.41                      | 2.41                       | ∞              |
| Boundary Effect                                                                | 1            | R              | $\sqrt{3}$ | 1                      | 1                       | 0.58                      | 0.58                       | ∞              |
| Linearity                                                                      | 4.7          | R              | $\sqrt{3}$ | 1                      | 1                       | 2.71                      | 2.71                       | ∞              |
| system Detection Limits                                                        | 1            | R              | $\sqrt{3}$ | 1                      | 1                       | 0.58                      | 0.58                       | ∞              |
| Modulation response                                                            | 3            | N              | 1          | 1                      | 1                       | 3.00                      | 3.00                       | ∞              |
| Readout Electronics                                                            | 0.5          | N              | 1          | 1                      | 1                       | 0.50                      | 0.50                       | ∞              |
| Response Time                                                                  | 0            | R              | $\sqrt{3}$ | 1                      | 1                       | 0.00                      | 0.00                       | ∞              |
| Integration Time                                                               | 1.4          | R              | $\sqrt{3}$ | 1                      | 1                       | 0.81                      | 0.81                       | ∞              |
| RF Ambient Conditions-Noise                                                    | 3            | R              | $\sqrt{3}$ | 1                      | 1                       | 1.73                      | 1.73                       | ∞              |
| RF Ambient Conditions-Reflections                                              | 3            | R              | $\sqrt{3}$ | 1                      | 1                       | 1.73                      | 1.73                       | ∞              |
| Probe Positioner Mechanical Tolerance                                          | 1.4          | R              | $\sqrt{3}$ | 1                      | 1                       | 0.81                      | 0.81                       | ∞              |
| Probe positioning with respect to Phantom Shell                                | 1.4          | R              | $\sqrt{3}$ | 1                      | 1                       | 0.81                      | 0.81                       | ∞              |
| Extrapolation, interpolation and Integration Algorithms for Max.SAR Evaluation | 2.3          | R              | $\sqrt{3}$ | 1                      | 1                       | 1.33                      | 1.33                       | ∞              |
| <b>Test sample Related</b>                                                     |              |                |            |                        |                         |                           |                            |                |
| Test Sample Positioning                                                        | 2.7          | N              | 1          | 1                      | 1                       | 2.70                      | 2.70                       | 11             |
| Device Holder Uncertainty                                                      | 3            | N              | 1          | 1                      | 1                       | 3.00                      | 3.00                       | 7              |
| Output Power Variation-SAR drift measurement                                   | 5            | R              | $\sqrt{3}$ | 1                      | 1                       | 2.89                      | 2.89                       | ∞              |
| SAR scaling                                                                    | 2            | R              | $\sqrt{3}$ | 1                      | 1                       | 1.15                      | 1.15                       | ∞              |







| Phantom and Tissue Parameters                                                        |     |     |            |      |      |       |       |          |
|--------------------------------------------------------------------------------------|-----|-----|------------|------|------|-------|-------|----------|
| Phantom Uncertainty<br>(shape and thickness tolerances)                              | 4   | R   | $\sqrt{3}$ | 1    | 1    | 2.31  | 2.31  | $\infty$ |
| Uncertainty in SAR correction for<br>deviation<br>(in permittivity and conductivity) | 2   | N   | 1          | 1    | 0.84 | 2.00  | 1.68  | $\infty$ |
| Liquid conductivity ( meas. )                                                        | 2.5 | N   | 1          | 0.64 | 0.43 | 1.60  | 1.08  | 5        |
| Liquid conductivity (target.)                                                        | 5   | R   | $\sqrt{3}$ | 0.64 | 0.43 | 1.85  | 1.24  | 5        |
| Liquid Permittivity ( meas. )                                                        | 2.5 | N   | 1          | 0.60 | 0.49 | 1.50  | 1.23  | $\infty$ |
| Liquid Permittivity (target.)                                                        | 5   | R   | $\sqrt{3}$ | 0.60 | 0.49 | 1.73  | 1.42  | $\infty$ |
| <b>Combined Standard Uncertainty</b>                                                 |     | Rss |            |      |      | 10.72 | 10.43 |          |
| <b>Expanded Uncertainty{95%<br/>CONFIDENCE INTERVAL}</b>                             |     | k   |            |      |      | 21.44 | 20.86 |          |







## 8.2 Measurement uncertainty evaluation for system check

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

| Uncertainty For System Performance Check                                        |              |                |            |                      |                       |                           |                            |                |
|---------------------------------------------------------------------------------|--------------|----------------|------------|----------------------|-----------------------|---------------------------|----------------------------|----------------|
| Uncertainty Component                                                           | Tol.<br>(±%) | Prob.<br>Dist. | Div.       | C <sub>i</sub><br>1g | C <sub>i</sub><br>10g | 1g<br>U <sub>i</sub> (±%) | 10g<br>U <sub>i</sub> (±%) | V <sub>i</sub> |
| <b>measurement system</b>                                                       |              |                |            |                      |                       |                           |                            |                |
| Probe Calibration                                                               | 5.8          | N              | 1          | 1                    | 1                     | 5.80                      | 5.80                       | ∞              |
| Axial Isotropy                                                                  | 3.5          | R              | $\sqrt{3}$ | $(1-C_p)^{1/2}$      | $(1-C_p)^{1/2}$       | 1.43                      | 1.43                       | ∞              |
| Hemispherical Isotropy                                                          | 5.9          | R              | $\sqrt{3}$ | $\sqrt{C_p}$         | $\sqrt{C_p}$          | 2.41                      | 2.41                       | ∞              |
| Boundary Effect                                                                 | 1            | R              | $\sqrt{3}$ | 1                    | 1                     | 0.58                      | 0.58                       | ∞              |
| Linearity                                                                       | 4.7          | R              | $\sqrt{3}$ | 1                    | 1                     | 2.71                      | 2.71                       | ∞              |
| system detection Limits                                                         | 1            | R              | $\sqrt{3}$ | 1                    | 1                     | 0.58                      | 0.58                       | ∞              |
| Modulation response                                                             | 0            | N              | 1          | 1                    | 1                     | 0.00                      | 0.00                       | ∞              |
| Readout Electronics                                                             | 0.5          | N              | 1          | 1                    | 1                     | 0.50                      | 0.50                       | ∞              |
| Response Time                                                                   | 0            | R              | $\sqrt{3}$ | 1                    | 1                     | 0.00                      | 0.00                       | ∞              |
| Integration Time                                                                | 1.4          | R              | $\sqrt{3}$ | 1                    | 1                     | 0.81                      | 0.81                       | ∞              |
| RF ambient Conditions - Noise                                                   | 3            | R              | $\sqrt{3}$ | 1                    | 1                     | 1.73                      | 1.73                       | ∞              |
| RF ambient Conditions – Reflections                                             | 3            | R              | $\sqrt{3}$ | 1                    | 1                     | 1.73                      | 1.73                       | ∞              |
| Probe positioned Mechanical Tolerance                                           | 1.4          | R              | $\sqrt{3}$ | 1                    | 1                     | 0.81                      | 0.81                       | ∞              |
| Probe positioning with respect to Phantom Shell                                 | 1.4          | R              | $\sqrt{3}$ | 1                    | 1                     | 0.81                      | 0.81                       | ∞              |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | 2.3          | R              | $\sqrt{3}$ | 1                    | 1                     | 1.33                      | 1.33                       | ∞              |
| <b>Dipole</b>                                                                   |              |                |            |                      |                       |                           |                            |                |
| Deviation of experimental source from numerical source                          | 4            | N              | 1          | 1                    | 1                     | 4.00                      | 4.00                       | ∞              |
| Input power and SAR drift measurement                                           | 5            | R              | $\sqrt{3}$ | 1                    | 1                     | 2.89                      | 2.89                       | ∞              |
| Dipole axis to liquid Distance                                                  | 2            | R              | $\sqrt{3}$ | 1                    | 1                     | 1.16                      | 1.16                       | ∞              |
| <b>Phantom and Tissue Parameters</b>                                            |              |                |            |                      |                       |                           |                            |                |
| Phantom Uncertainty (shape and thickness tolerances)                            | 4            | R              | $\sqrt{3}$ | 1                    | 1                     | 2.31                      | 2.31                       | ∞              |
| Uncertainty in SAR correction for deviation (in permittivity and conductivity)  | 2            | N              | 1          | 1                    | 0.84                  | 2.00                      | 1.68                       | ∞              |
| Liquid conductivity ( meas. )                                                   | 2.5          | N              | 1          | 0.64                 | 0.43                  | 1.60                      | 1.08                       | 5              |







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

|                                                           |     |     |            |      |      |       |       |          |
|-----------------------------------------------------------|-----|-----|------------|------|------|-------|-------|----------|
| Liquid conductivity (target.)                             | 5   | R   | $\sqrt{3}$ | 0.64 | 0.43 | 1.85  | 1.24  | 5        |
| Liquid Permittivity ( meas. )                             | 2.5 | N   | 1          | 0.60 | 0.49 | 1.50  | 1.23  | $\infty$ |
| Liquid Permittivity (target.)                             | 5   | R   | $\sqrt{3}$ | 0.60 | 0.49 | 1.73  | 1.41  | $\infty$ |
| <b>Combined Standard Uncertainty</b>                      |     | Rss |            |      |      | 10.28 | 9.98  |          |
| <b>Expanded Uncertainty<br/>(95% Confidence interval)</b> |     | k   |            |      |      | 20.56 | 19.96 |          |







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 9 Detailed Test Results

### 9.1.1 Results overview of Wi-Fi 2.4G

| Test Position of Body<br>With 5mm | Test<br>channel<br>/Frequency | Test<br>Mode | SAR Value<br>(W/kg) |              | Power<br>Drift<br>(%) | Limit<br>(W/kg) | Liquid<br>Temp. | Plot<br>No. |
|-----------------------------------|-------------------------------|--------------|---------------------|--------------|-----------------------|-----------------|-----------------|-------------|
|                                   |                               |              | 1-g                 | 10-g         |                       |                 |                 |             |
| Towards Ground                    | 7/2442                        | 802.11b      | 0.161               | <b>0.070</b> | 1.890                 | 2.0             | 21.6°C          | /           |

## 9.2 Multiple Transmitter Information

The max output power of BT antenna is as following:

| BT | EIRP(dBm)      |      |      |             |
|----|----------------|------|------|-------------|
|    |                | 0CH  | 39CH | 78CH        |
|    | GFSK           | 3.71 | 3.55 | <b>4.43</b> |
|    | $\pi$ /4-DQPSK | 3.68 | 3.53 | 4.40        |
|    | 8DPSK          | 3.70 | 3.51 | 4.42        |

Note: 1) channel /Frequency:0/2402,39/2441,78/2480.

The max output power of Wi-Fi 2.4G is as following:

| Wi-Fi<br>2450MHz | Channel | EIRP(dBm)   |
|------------------|---------|-------------|
| 802.11b          | 1       | 7.10        |
|                  | 7       | 7.41        |
|                  | 13      | <b>7.80</b> |
| 802.11g          | 1       | 6.70        |
|                  | 7       | 7.04        |
|                  | 13      | 7.26        |
| 802.11n<br>(20M) | 1       | 6.24        |
|                  | 7       | 6.61        |
|                  | 13      | 6.80        |
| 802.11n<br>(40M) | 3       | 5.87        |
|                  | 7       | 5.87        |
|                  | 11      | 5.73        |

Note: 1) channel /Frequency: 1/2412, 3/2422, 7/2442, 11/2462, 13/2472.







### 9.3 Stand-alone SAR

According to the output power measurement result we can draw the conclusion that:

Stand-alone SAR evaluation is not required for BT, because the output power of BT 3.0 unlicensed transmitter is  $4.43\text{dBm} \leq 20\text{mW}$  (13dBm).

Stand-alone SAR evaluation is required for Wi-Fi 2.4G, because the output power of Wi-Fi 2.4G unlicensed transmitter is  $7.80\text{dBm} > 20\text{mW}$  (13dBm).

### 9.4 Simultaneous SAR

The device does not support simultaneous BT and Wi-Fi 2.4G, because the BT and Wi-Fi 2.4G share the same antenna and can't transmit simultaneously.

The Max simultaneous SAR of frequencies band as below:

| Test Position | Measured SAR <sub>Max</sub> (W/Kg) | $\sum_{10\text{-g}}$ SAR (W/Kg) |
|---------------|------------------------------------|---------------------------------|
| Body          | Wi-Fi (2.4G)                       |                                 |
|               | 0.070                              | 0.070                           |







For Question,  
Please Contact with WSCT  
www.wsct-cert.com

## 10 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

|                                     | Manufact<br>urer | Device Type                             | Type(Model)                    | Serial number            | calibration |            |
|-------------------------------------|------------------|-----------------------------------------|--------------------------------|--------------------------|-------------|------------|
|                                     |                  |                                         |                                |                          | Last Cal.   | Due Date   |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR<br>DOSIMETRIC E FIELD<br>PROBE  | SSE5                           | 0123-EPGO-396            | 2023-01-30  | 2024-01-29 |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR 750 MHz<br>REFERENCE DIPOLE     | SID750                         | SN 48/16<br>DIP0G750-444 | 2020-06-25  | 2023-06-24 |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR 835 MHz<br>REFERENCE DIPOLE     | SID835                         | SN 14/13<br>DIP0G835-235 | 2020-06-25  | 2023-06-24 |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR 900 MHz<br>REFERENCE DIPOLE     | SID900                         | SN 14/13<br>DIP0G900-231 | 2020-06-25  | 2023-06-24 |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR 1800 MHz<br>REFERENCE DIPOLE    | SID1800                        | SN 14/13<br>DIP1G800-232 | 2020-06-25  | 2023-06-24 |
| <input type="checkbox"/>            | SATIMO           | COMOSAR 1900 MHz<br>REFERENCE DIPOLE    | SID1900                        | SN 14/13<br>DIP1G900-236 | 2020-06-25  | 2023-06-24 |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR 2000 MHz<br>REFERENCE DIPOLE    | SID2000                        | SN 14/13<br>DIP2G000-237 | 2020-06-25  | 2023-06-24 |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR 2450 MHz<br>REFERENCE DIPOLE    | SID2450                        | SN 14/13<br>DIP2G450-238 | 2020-06-25  | 2023-06-24 |
| <input checked="" type="checkbox"/> | SATIMO           | COMOSAR 2600 MHz<br>REFERENCE DIPOLE    | SID2600                        | SN 28/14<br>DIP2G600-327 | 2020-06-25  | 2023-06-24 |
| <input checked="" type="checkbox"/> | SATIMO           | Software                                | OPENSAR                        | N/A                      | N/A         | N/A        |
| <input checked="" type="checkbox"/> | SATIMO           | Phantom                                 | COMOSAR<br>IEEE SAM<br>PHANTOM | SN 14/13 SAM99           | N/A         | N/A        |
| <input checked="" type="checkbox"/> | R & S            | Universal Radio<br>Communication Tester | CMU 200                        | 119733                   | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | R & S            | Universal Radio<br>Communication Tester | CMW500                         | 144459                   | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | R & S            | Universal Radio<br>Communication Tester | 5G 综测仪                         | MY60192341               | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | HP               | Network Analyser                        | 8753D                          | 3410A08889               | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | HP               | Signal Generator                        | E4421B                         | GB39340770               | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | Keithley         | Multimeter                              | Keithley<br>2000               | 4014539                  | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | SATIMO           | Amplifier                               | Power<br>Amplifier             | MODU-023-A-<br>0004      | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | Agilent          | Power Meter                             | E4418B                         | GB43312909               | 2022-11-03  | 2023-11-02 |
| <input checked="" type="checkbox"/> | Agilent          | Power Meter Sensor                      | E4412A                         | MY41500046               | 2022-11-03  | 2023-11-02 |





## Annex A: Photo documentation

Photo 1: Front view



Photo 2: Rear View

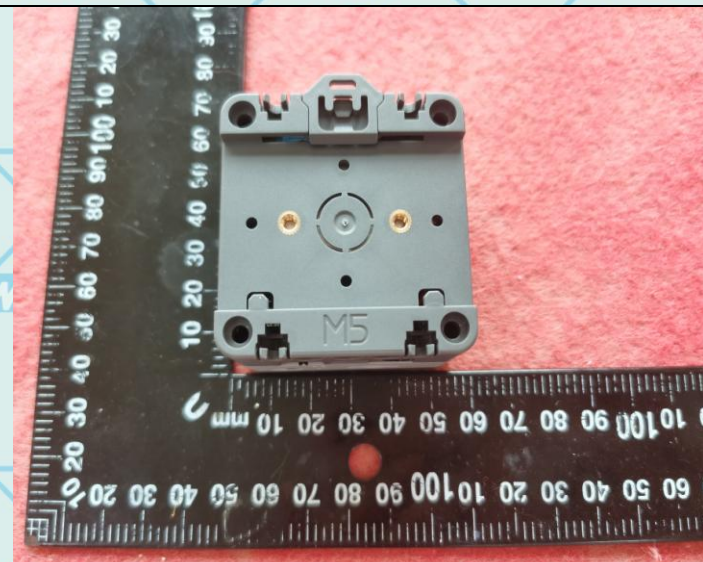


Photo 3: Towards Ground 5mm



Photo4: Liquid Depth  $\geq 15.0\text{cm}$



## Annex B: Measurement results

(Please See the SAR Measurement Max Plots of annex B.)

## Annex C: Calibration reports

(Please See the Calibration reports of annex C.)





## Annex A: System Check

**Tested Model : M5CoreS3**

**Report Number:  
WSCT-R&E230300103A-SAR**

### I. RESULTS

| <u>TYPE</u> | <u>BAND</u> | <u>PARAMETERS</u>                                                                        |
|-------------|-------------|------------------------------------------------------------------------------------------|
| Validation  | CW2450      | Measurement 1: Validation Plane with Dipole device position on Middle Channel in CW mode |



## MEASUREMENT 1

Type: Validation measurement (Complete)

Date of measurement: 7/3/2023

Measurement duration: 13 minutes 47 seconds

### **A. Experimental conditions.**

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| <b><u>Area Scan</u></b>       | <u>dx=8mm dy=8mm</u>                                   |
| <b><u>ZoomScan</u></b>        | <u>5x5x7, dx=8mm dy=8mm</u><br><u>dz=5mm, Complete</u> |
| <b><u>Phantom</u></b>         | <u>Validation plane</u>                                |
| <b><u>Device Position</u></b> | <u>Dipole</u>                                          |
| <b><u>Band</u></b>            | <u>CW2450</u>                                          |
| <b><u>Channels</u></b>        | <u>Middle</u>                                          |
| <b><u>Signal</u></b>          | <u>CW (Crest factor: 1.0)</u>                          |

### **B. SAR Measurement Results**

Middle Band SAR (Channel -1):


|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2450.000000 |
| <b>Relative permittivity (real part)</b>      | 40.274899   |
| <b>Relative permittivity (imaginary part)</b> | 13.362500   |
| <b>Conductivity (S/m)</b>                     | 1.818785    |




**Variation (%)**

**-0.240000**

## SURFACE SAR

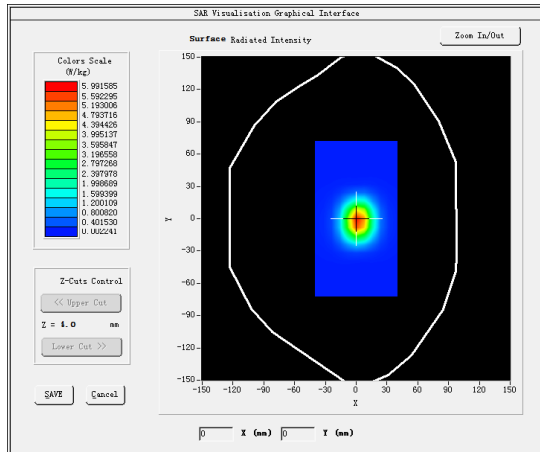

## VOLUME SAR

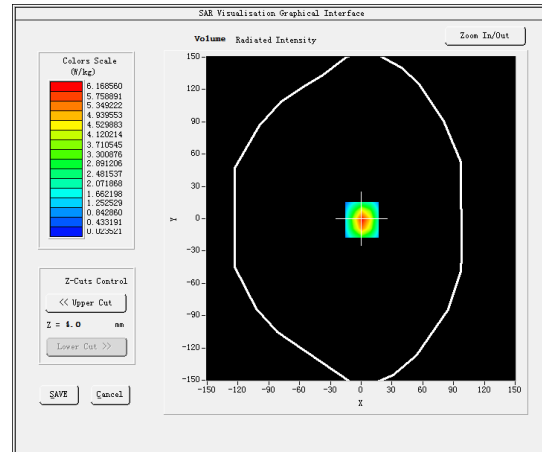

**Maximum location: X=1.00, Y=-1.00**

**SAR Peak: 10.79 W/kg**


**SAR 10g (W/Kg)**



**2.544572**

**SAR 1g (W/Kg)**

**5.781925**

| Z (mm)     | 0.00    | 4.00   | 9.00   | 14.00  | 19.00  | 24.00  | 29.00  |
|------------|---------|--------|--------|--------|--------|--------|--------|
| SAR (W/Kg) | 10.8337 | 6.1686 | 2.8345 | 1.3480 | 0.6494 | 0.3162 | 0.1548 |

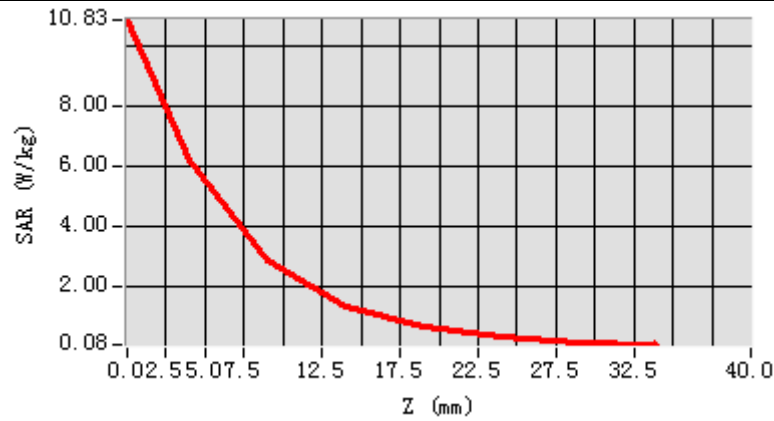
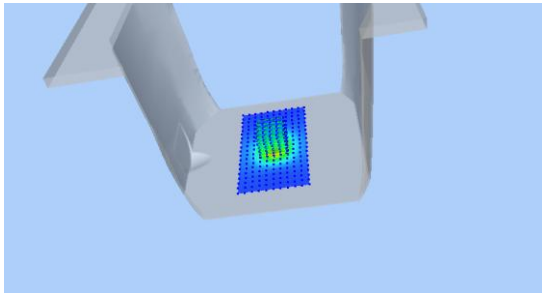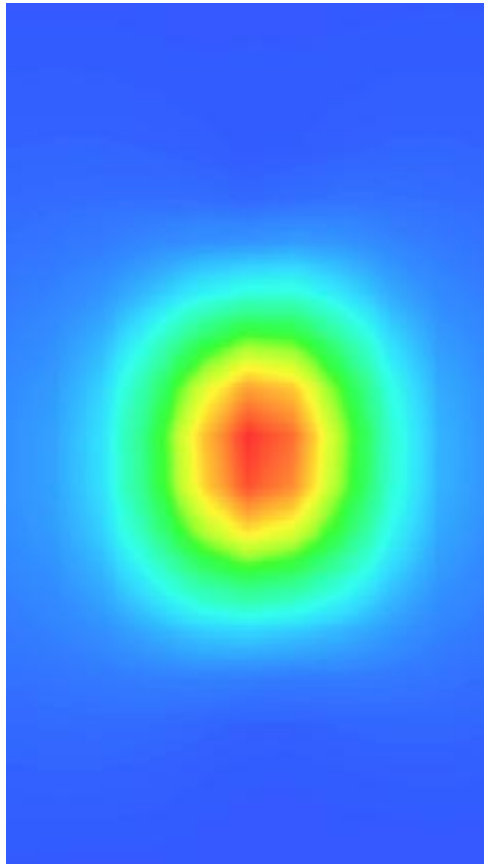
| 3D screen shot                                                                      | Hot spot position                                                                    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |





## **Annex B: Measurement Results**

**Tested Model : M5CoreS3**

**Report Number:  
WSCT-R&E230300103A-SAR**

## MEASUREMENT 1

### Rear-side-middle

Type: Phone measurement (Complete)

Date of measurement: 07/03/2023

Measurement duration: 10 minutes 12 seconds

### **A. Experimental conditions.**

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| <b><u>Area Scan</u></b>       | <u>dx=15mm dy=15mm</u>                                 |
| <b><u>ZoomScan</u></b>        | <u>5x5x7, dx=8mm dy=8mm</u><br><u>dz=5mm, Complete</u> |
| <b><u>Phantom</u></b>         | <u>Validation plane</u>                                |
| <b><u>Device Position</u></b> | <u>Body</u>                                            |
| <b><u>Band</u></b>            | <u>IEEE 802.11b ISM</u>                                |
| <b><u>Channels</u></b>        | <u>Middle</u>                                          |
| <b><u>Signal</u></b>          | <u>IEEE802.b (Crest factor: 1.0)</u>                   |


### **B. SAR Measurement Results**

Middle Band SAR (Channel 7):


|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2442.000000 |
| <b>Relative permittivity (real part)</b>      | 40.745499   |
| <b>Relative permittivity (imaginary part)</b> | 13.560400   |
| <b>Conductivity (S/m)</b>                     | 1.839694    |
| <b>Variation (%)</b>                          | 1.890000    |



## SURFACE SAR

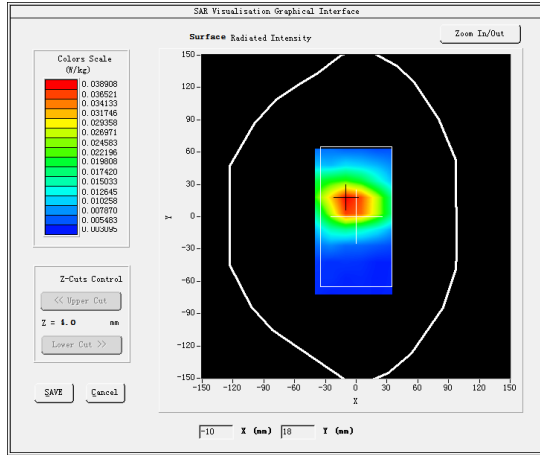

## VOLUME SAR

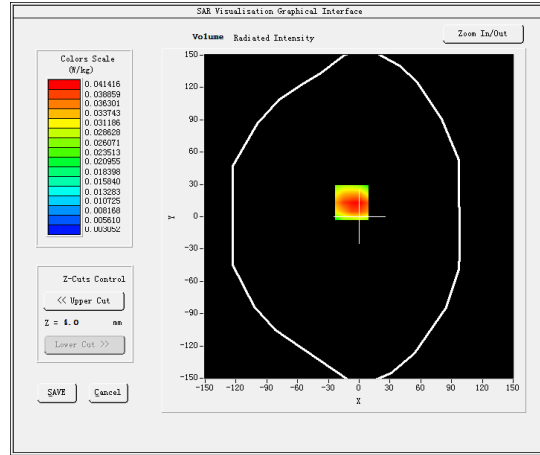




**Maximum location: X=-7.00, Y=13.00**

**SAR Peak: 0.07 W/kg**

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.070251 |
| <b>SAR 1g (W/Kg)</b>  | 0.161412 |

| Z (mm)     | 0.00   | 4.00   | 9.00   | 14.00  | 19.00  | 24.00  | 29.00  |
|------------|--------|--------|--------|--------|--------|--------|--------|
| SAR (W/Kg) | 0.0760 | 0.0414 | 0.0183 | 0.0094 | 0.0064 | 0.0036 | 0.0036 |

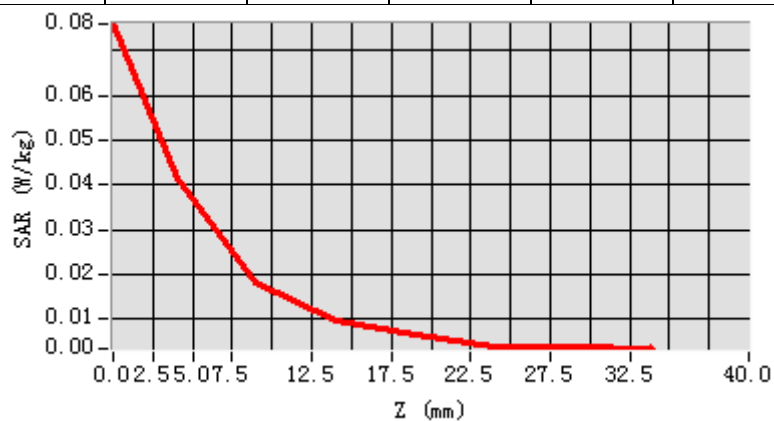
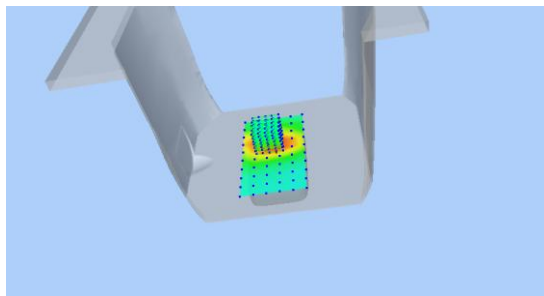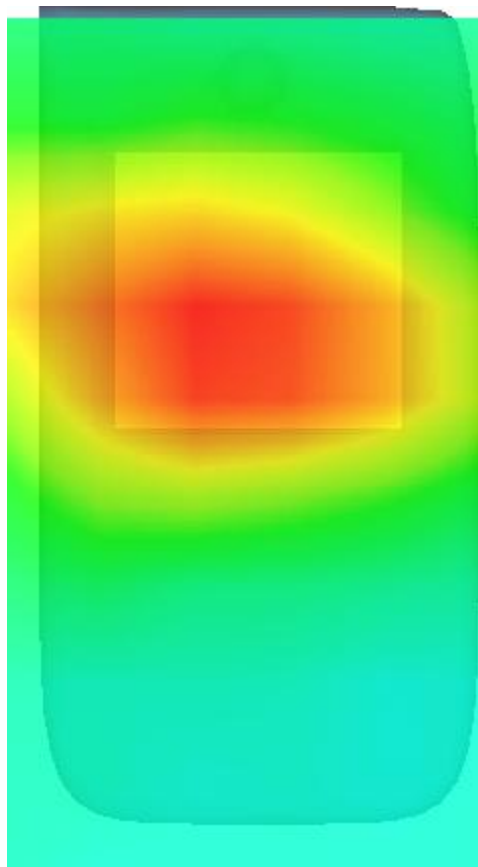
| 3D screen shot                                                                      | Hot spot position                                                                    |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |





## **Annex C: Calibration Reports**

**Tested Model : M5CoreS3**

**Report Number:**

**WSCT-R&E230300103A-SAR**



## SAR Reference Dipole Calibration Report

Ref : ACR.178.18.20.MVGB.A

### WORLD STANDARDIZATION CERTIFICATION & TESTING GROUP CO.,LTD

BLOCK A, BAO SHI SCIENCE PARK, BAO SHI ROAD,  
BAO'AN DISTRICT

SHENZHEN 518108, P.R. CHINA

### MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 2450 MHZ

SERIAL NO.: SN 14/13 DIP2G450-238

Calibrated at MVG MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon

29280 PLOUZANE - FRANCE

Calibration date: 06/25/2020




Accreditations #2-6789 and #2-6814  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)

#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.





|                      | <i>Name</i>  | <i>Function</i>     | <i>Date</i> | <i>Signature</i>                                                                    |
|----------------------|--------------|---------------------|-------------|-------------------------------------------------------------------------------------|
| <i>Prepared by :</i> | Jérôme LUC   | Technical Manager   | 6/26/2020   |  |
| <i>Checked by :</i>  | Jérôme LUC   | Technical Manager   | 6/26/2020   |  |
| <i>Approved by :</i> | Yann Toutain | Laboratory Director | 6/26/2020   |  |

|                       | <i>Customer Name</i>                                                     |
|-----------------------|--------------------------------------------------------------------------|
| <i>Distribution :</i> | World<br>Standardization<br>Certification &<br>Testing Group Co<br>.,Ltd |

| <i>Issue</i> | <i>Name</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|-------------|----------------------|
| A            | Jérôme LUC  | 6/26/2020   | Initial release      |
|              |             |             |                      |
|              |             |             |                      |
|              |             |             |                      |

## TABLE OF CONTENTS

|     |                                                |    |
|-----|------------------------------------------------|----|
| 1   | Introduction.....                              | 4  |
| 2   | Device Under Test .....                        | 4  |
| 3   | Product Description .....                      | 4  |
| 3.1 | General Information .....                      | 4  |
| 4   | Measurement Method .....                       | 5  |
| 4.1 | Return Loss Requirements .....                 | 5  |
| 4.2 | Mechanical Requirements .....                  | 5  |
| 5   | Measurement Uncertainty .....                  | 5  |
| 5.1 | Return Loss .....                              | 5  |
| 5.2 | Dimension Measurement .....                    | 5  |
| 5.3 | Validation Measurement .....                   | 5  |
| 6   | Calibration Measurement Results .....          | 6  |
| 6.1 | Return Loss and Impedance In Head Liquid ..... | 6  |
| 6.2 | Return Loss and Impedance In Body Liquid ..... | 6  |
| 6.3 | Mechanical Dimensions .....                    | 6  |
| 7   | Validation measurement .....                   | 7  |
| 7.1 | Head Liquid Measurement .....                  | 7  |
| 7.2 | SAR Measurement Result With Head Liquid .....  | 8  |
| 7.3 | Body Liquid Measurement .....                  | 9  |
| 7.4 | SAR Measurement Result With Body Liquid .....  | 10 |
| 8   | List of Equipment .....                        | 11 |



## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                   |
|--------------------------------|-----------------------------------|
| Device Type                    | COMOSAR 2450 MHz REFERENCE DIPOLE |
| Manufacturer                   | MVG                               |
| Model                          | SID2450                           |
| Serial Number                  | SN 14/13 DIP2G450-238             |
| Product Condition (new / used) | Used                              |

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



**Figure 1 – MVG COMOSAR Validation Dipole**

## 4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

## 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ , traceable to the Internationally Accepted Guides to Measurement Uncertainty.

### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

| Frequency band | Expanded Uncertainty on Return Loss |
|----------------|-------------------------------------|
| 400-6000MHz    | 0.08 LIN                            |

### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

| Length (mm) | Expanded Uncertainty on Length |
|-------------|--------------------------------|
| 0 - 300     | 0.20 mm                        |
| 300 - 450   | 0.44 mm                        |

### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.


| Scan Volume | Expanded Uncertainty |
|-------------|----------------------|
|-------------|----------------------|



|      |            |
|------|------------|
| 1 g  | 19 % (SAR) |
| 10 g | 19 % (SAR) |


## 6 CALIBRATION MEASUREMENT RESULTS

### 6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

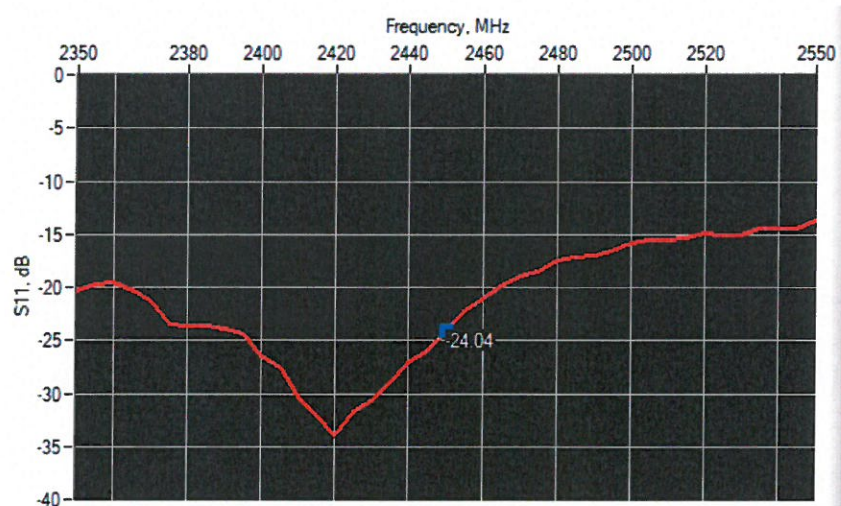

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                      |
|-----------------|------------------|------------------|--------------------------------|
| 2450            | -24.04           | -20              | 49.9 $\Omega$ - 6.3 j $\Omega$ |

### 6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

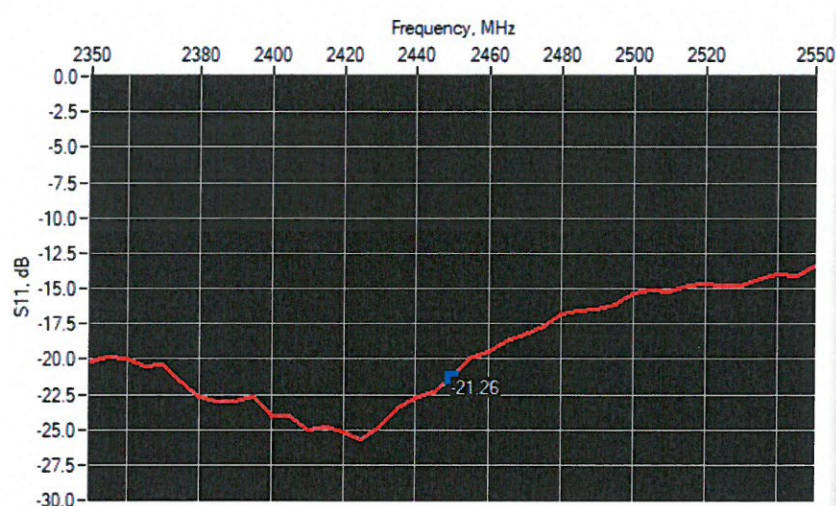

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                      |
|-----------------|------------------|------------------|--------------------------------|
| 2450            | -21.26           | -20              | 52.5 $\Omega$ - 8.2 j $\Omega$ |

### 6.3 MECHANICAL DIMENSIONS

| Frequency MHz | L mm     |          | h mm     |          | d mm     |          |
|---------------|----------|----------|----------|----------|----------|----------|
|               | required | measured | required | measured | required | measured |



|      |             |   |             |   |            |   |
|------|-------------|---|-------------|---|------------|---|
| 300  | 420.0 ±1 %. |   | 250.0 ±1 %. |   | 6.35 ±1 %. |   |
| 450  | 290.0 ±1 %. |   | 166.7 ±1 %. |   | 6.35 ±1 %. |   |
| 750  | 176.0 ±1 %. |   | 100.0 ±1 %. |   | 6.35 ±1 %. |   |
| 835  | 161.0 ±1 %. |   | 89.8 ±1 %.  |   | 3.6 ±1 %.  |   |
| 900  | 149.0 ±1 %. |   | 83.3 ±1 %.  |   | 3.6 ±1 %.  |   |
| 1450 | 89.1 ±1 %.  |   | 51.7 ±1 %.  |   | 3.6 ±1 %.  |   |
| 1500 | 80.5 ±1 %.  |   | 50.0 ±1 %.  |   | 3.6 ±1 %.  |   |
| 1640 | 79.0 ±1 %.  |   | 45.7 ±1 %.  |   | 3.6 ±1 %.  |   |
| 1750 | 75.2 ±1 %.  |   | 42.9 ±1 %.  |   | 3.6 ±1 %.  |   |
| 1800 | 72.0 ±1 %.  |   | 41.7 ±1 %.  |   | 3.6 ±1 %.  |   |
| 1900 | 68.0 ±1 %.  |   | 39.5 ±1 %.  |   | 3.6 ±1 %.  |   |
| 1950 | 66.3 ±1 %.  |   | 38.5 ±1 %.  |   | 3.6 ±1 %.  |   |
| 2000 | 64.5 ±1 %.  |   | 37.5 ±1 %.  |   | 3.6 ±1 %.  |   |
| 2100 | 61.0 ±1 %.  |   | 35.7 ±1 %.  |   | 3.6 ±1 %.  |   |
| 2300 | 55.5 ±1 %.  |   | 32.6 ±1 %.  |   | 3.6 ±1 %.  |   |
| 2450 | 51.5 ±1 %.  | - | 30.4 ±1 %.  | - | 3.6 ±1 %.  | - |
| 2600 | 48.5 ±1 %.  |   | 28.8 ±1 %.  |   | 3.6 ±1 %.  |   |
| 3000 | 41.5 ±1 %.  |   | 25.0 ±1 %.  |   | 3.6 ±1 %.  |   |
| 3500 | 37.0 ±1 %.  |   | 26.4 ±1 %.  |   | 3.6 ±1 %.  |   |
| 3700 | 34.7 ±1 %.  |   | 26.4 ±1 %.  |   | 3.6 ±1 %.  |   |

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

### 7.1 HEAD LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r'$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|-----------------------------------------|----------|-------------------------------|----------|
|                  | required                                | measured | required                      | measured |
| 300              | 45.3 ±10 %                              |          | 0.87 ±10 %                    |          |
| 450              | 43.5 ±10 %                              |          | 0.87 ±10 %                    |          |
| 750              | 41.9 ±10 %                              |          | 0.89 ±10 %                    |          |
| 835              | 41.5 ±10 %                              |          | 0.90 ±10 %                    |          |
| 900              | 41.5 ±10 %                              |          | 0.97 ±10 %                    |          |
| 1450             | 40.5 ±10 %                              |          | 1.20 ±10 %                    |          |
| 1500             | 40.4 ±10 %                              |          | 1.23 ±10 %                    |          |
| 1640             | 40.2 ±10 %                              |          | 1.31 ±10 %                    |          |



|      |            |      |            |      |
|------|------------|------|------------|------|
| 1750 | 40.1 ±10 % |      | 1.37 ±10 % |      |
| 1800 | 40.0 ±10 % |      | 1.40 ±10 % |      |
| 1900 | 40.0 ±10 % |      | 1.40 ±10 % |      |
| 1950 | 40.0 ±10 % |      | 1.40 ±10 % |      |
| 2000 | 40.0 ±10 % |      | 1.40 ±10 % |      |
| 2100 | 39.8 ±10 % |      | 1.49 ±10 % |      |
| 2300 | 39.5 ±10 % |      | 1.67 ±10 % |      |
| 2450 | 39.2 ±10 % | 41.9 | 1.80 ±10 % | 1.88 |
| 2600 | 39.0 ±10 % |      | 1.96 ±10 % |      |
| 3000 | 38.5 ±10 % |      | 2.40 ±10 % |      |
| 3500 | 37.9 ±10 % |      | 2.91 ±10 % |      |


## 7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

|                                           |                                              |
|-------------------------------------------|----------------------------------------------|
| Software                                  | OPENSAR V5                                   |
| Phantom                                   | SN 13/09 SAM68                               |
| Probe                                     | SN 41/18 EPG0333                             |
| Liquid                                    | Head Liquid Values: eps' : 41.9 sigma : 1.88 |
| Distance between dipole center and liquid | 10.0 mm                                      |
| Area scan resolution                      | dx=8mm/dy=8mm                                |
| Zoon Scan Resolution                      | dx=5mm/dy=5mm/dz=5mm                         |
| Frequency                                 | 2450 MHz                                     |
| Input power                               | 20 dBm                                       |
| Liquid Temperature                        | 20 +/- 1 °C                                  |
| Lab Temperature                           | 20 +/- 1 °C                                  |
| Lab Humidity                              | 30-70 %                                      |

| Frequency<br>MHz | 1 g SAR (W/kg/W) |          | 10 g SAR (W/kg/W) |          |
|------------------|------------------|----------|-------------------|----------|
|                  | required         | measured | required          | measured |
| 300              | 2.85             |          | 1.94              |          |
| 450              | 4.58             |          | 3.06              |          |
| 750              | 8.49             |          | 5.55              |          |
| 835              | 9.56             |          | 6.22              |          |
| 900              | 10.9             |          | 6.99              |          |
| 1450             | 29               |          | 16                |          |
| 1500             | 30.5             |          | 16.8              |          |
| 1640             | 34.2             |          | 18.4              |          |
| 1750             | 36.4             |          | 19.3              |          |
| 1800             | 38.4             |          | 20.1              |          |
| 1900             | 39.7             |          | 20.5              |          |
| 1950             | 40.5             |          | 20.9              |          |

|      |      |              |      |              |
|------|------|--------------|------|--------------|
| 2000 | 41.1 |              | 21.1 |              |
| 2100 | 43.6 |              | 21.9 |              |
| 2300 | 48.7 |              | 23.3 |              |
| 2450 | 52.4 | 53.25 (5.33) | 24   | 23.94 (2.39) |
| 2600 | 55.3 |              | 24.6 |              |
| 3000 | 63.8 |              | 25.7 |              |
| 3500 | 67.1 |              | 25   |              |
| 3700 | 67.4 |              | 24.2 |              |

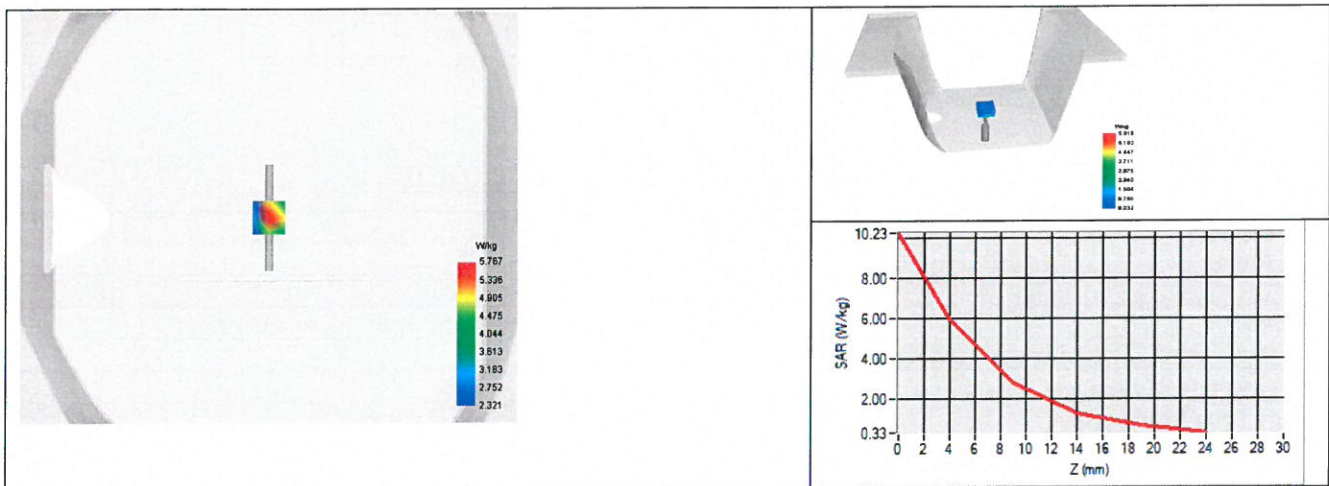

## 7.3 BODY LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r'$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|-----------------------------------------|----------|-------------------------------|----------|
|                  | required                                | measured | required                      | measured |
| 150              | 61.9 $\pm$ 10 %                         |          | 0.80 $\pm$ 10 %               |          |
| 300              | 58.2 $\pm$ 10 %                         |          | 0.92 $\pm$ 10 %               |          |
| 450              | 56.7 $\pm$ 10 %                         |          | 0.94 $\pm$ 10 %               |          |
| 750              | 55.5 $\pm$ 10 %                         |          | 0.96 $\pm$ 10 %               |          |
| 835              | 55.2 $\pm$ 10 %                         |          | 0.97 $\pm$ 10 %               |          |
| 900              | 55.0 $\pm$ 10 %                         |          | 1.05 $\pm$ 10 %               |          |
| 915              | 55.0 $\pm$ 10 %                         |          | 1.06 $\pm$ 10 %               |          |
| 1450             | 54.0 $\pm$ 10 %                         |          | 1.30 $\pm$ 10 %               |          |
| 1610             | 53.8 $\pm$ 10 %                         |          | 1.40 $\pm$ 10 %               |          |
| 1800             | 53.3 $\pm$ 10 %                         |          | 1.52 $\pm$ 10 %               |          |
| 1900             | 53.3 $\pm$ 10 %                         |          | 1.52 $\pm$ 10 %               |          |
| 2000             | 53.3 $\pm$ 10 %                         |          | 1.52 $\pm$ 10 %               |          |
| 2100             | 53.2 $\pm$ 10 %                         |          | 1.62 $\pm$ 10 %               |          |
| 2300             | 52.9 $\pm$ 10 %                         |          | 1.81 $\pm$ 10 %               |          |
| 2450             | 52.7 $\pm$ 10 %                         | 53.4     | 1.95 $\pm$ 10 %               | 2.14     |




|      |            |  |            |  |
|------|------------|--|------------|--|
| 2600 | 52.5 ±10 % |  | 2.16 ±10 % |  |
| 3000 | 52.0 ±10 % |  | 2.73 ±10 % |  |
| 3500 | 51.3 ±10 % |  | 3.31 ±10 % |  |
| 3700 | 51.0 ±10 % |  | 3.55 ±10 % |  |
| 5200 | 49.0 ±10 % |  | 5.30 ±10 % |  |
| 5300 | 48.9 ±10 % |  | 5.42 ±10 % |  |
| 5400 | 48.7 ±10 % |  | 5.53 ±10 % |  |
| 5500 | 48.6 ±10 % |  | 5.65 ±10 % |  |
| 5600 | 48.5 ±10 % |  | 5.77 ±10 % |  |
| 5800 | 48.2 ±10 % |  | 6.00 ±10 % |  |

#### 7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

|                                           |                                              |
|-------------------------------------------|----------------------------------------------|
| Software                                  | OPENSAR V5                                   |
| Phantom                                   | SN 13/09 SAM68                               |
| Probe                                     | SN 41/18 EPGO333                             |
| Liquid                                    | Body Liquid Values: eps' : 53.4 sigma : 2.14 |
| Distance between dipole center and liquid | 10.0 mm                                      |
| Area scan resolution                      | dx=8mm/dy=8mm                                |
| Zoon Scan Resolution                      | dx=5mm/dy=5mm/dz=5mm                         |
| Frequency                                 | 2450 MHz                                     |
| Input power                               | 20 dBm                                       |
| Liquid Temperature                        | 20 +/- 1 °C                                  |
| Lab Temperature                           | 20 +/- 1 °C                                  |
| Lab Humidity                              | 30-70 %                                      |

| Frequency<br>MHz | 1 g SAR (W/kg/W) | 10 g SAR (W/kg/W) |
|------------------|------------------|-------------------|
|                  | measured         | measured          |
| 2450             | 55.24 (5.52)     | 23.83 (2.38)      |

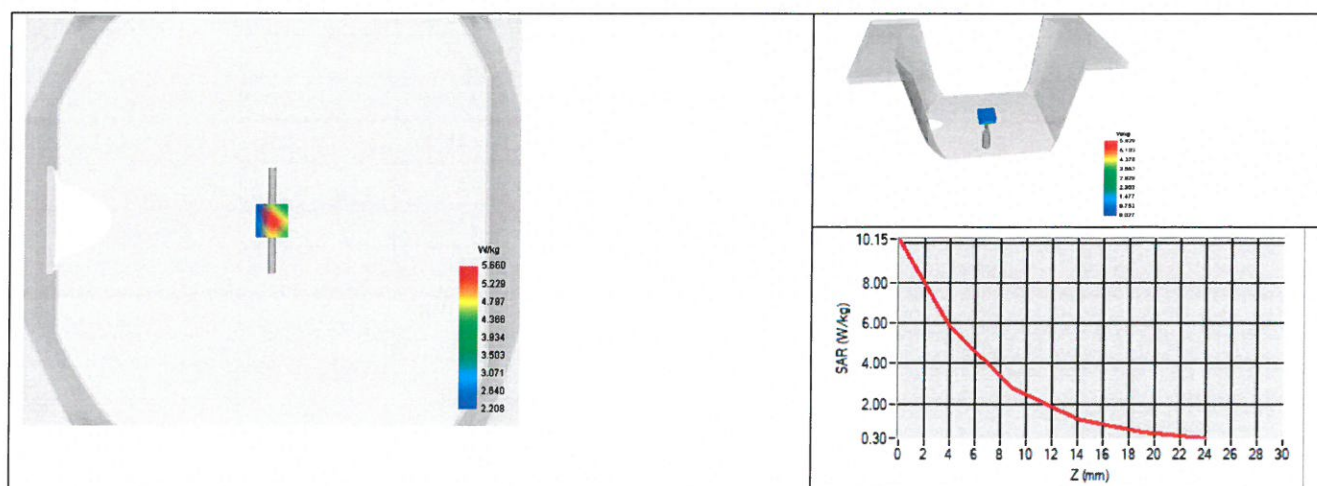



## 8 LIST OF EQUIPMENT

| Equipment Summary Sheet            |                         |                    |                                               |                                               |
|------------------------------------|-------------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description              | Manufacturer / Model    | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| SAM Phantom                        | MVG                     | SN-13/09-SAM68     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench                 | Version 3               | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                   | Rohde & Schwarz ZVM     | 100203             | 05/2019                                       | 05/2022                                       |
| Network Analyzer – Calibration kit | Rohde & Schwarz ZV-Z235 | 101223             | 05/2019                                       | 05/2022                                       |
| Calipers                           | Mitutoyo                | SN 0009732         | 10/2019                                       | 10/2022                                       |
| Reference Probe                    | MVG                     | EPGO333 SN 41/18   | 05/2020                                       | 05/2021                                       |
| Multimeter                         | Keithley 2000           | 1160271            | 02/2020                                       | 02/2023                                       |
| Signal Generator                   | Rohde & Schwarz SMB     | 106589             | 04/2019                                       | 04/2022                                       |
| Amplifier                          | Aethercomm              | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                        | NI-USB 5680             | 170100013          | 05/2019                                       | 05/2022                                       |
| Directional Coupler                | Narda 4216-20           | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature / Humidity Sensor      | Control Company         | 150798832          | 11/2017                                       | 11/2020                                       |





## COMOSAR E-Field Probe Calibration Report

Ref : ACR.30.6.23.BES.A

**WORLD STANDARDIZATION CERTIFICATION  
& TESTING GROUP CO.,LTD**  
**BLOCK A, BAO SHI SCIENCE PARK,BAO SHI ROAD,**  
**BAO'AN DISTRICT**  
**SHENZHEN 518108,P.R. CHINA**  
**MVG COMOSAR DOSIMETRIC E-FIELD PROBE**  
**SERIAL NO.: 0123-EPGO-396**

**Calibrated at MVG**  
**Z.I. de la pointe du diable**  
**Technopôle Brest Iroise – 295 avenue Alexis de Rochon**  
**29280 PLOUZANE - FRANCE**

**Calibration date: 01/30/2023**



Accreditations #2-6789  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)

**The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.**

### *Summary:*

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



|                                   | <i>Name</i>   | <i>Function</i>         | <i>Date</i> | <i>Signature</i>                                                                    |
|-----------------------------------|---------------|-------------------------|-------------|-------------------------------------------------------------------------------------|
| <i>Prepared by :</i>              | Cyrille ONNEE | Measurement Responsible | 1/30/2023   |  |
| <i>Checked &amp; approved by:</i> | Jérôme Luc    | Technical Manager       | 1/31/2023   |  |
| <i>Authorized by:</i>             | Yann Toutain  | Laboratory Director     | 1/31/2023   |  |

|                       | <i>Customer Name</i>                                                     |
|-----------------------|--------------------------------------------------------------------------|
| <i>Distribution :</i> | World<br>Standardization<br>Certification &<br>Testing Group Co<br>.,Ltd |

| <i>Issue</i> | <i>Name</i>   | <i>Date</i> | <i>Modifications</i> |
|--------------|---------------|-------------|----------------------|
| A            | Cyrille ONNEE | 1/30/2023   | Initial release      |
|              |               |             |                      |
|              |               |             |                      |
|              |               |             |                      |



## TABLE OF CONTENTS

|     |                               |   |
|-----|-------------------------------|---|
| 1   | Device Under Test .....       | 4 |
| 2   | Product Description .....     | 4 |
| 2.1 | General Information .....     | 4 |
| 3   | Measurement Method .....      | 4 |
| 3.1 | Sensitivity .....             | 4 |
| 3.2 | Linearity .....               | 5 |
| 3.3 | Isotropy .....                | 5 |
| 3.4 | Boundary Effect .....         | 5 |
| 4   | Measurement Uncertainty ..... | 6 |
| 5   | Calibration Results.....      | 6 |
| 5.1 | Calibration in air .....      | 6 |
| 5.2 | Calibration in liquid .....   | 7 |
| 6   | Verification Results .....    | 9 |
| 7   | List of Equipment .....       | 9 |

## 1 DEVICE UNDER TEST

| Device Under Test                        |                                                                         |
|------------------------------------------|-------------------------------------------------------------------------|
| Device Type                              | COMOSAR DOSIMETRIC E FIELD PROBE                                        |
| Manufacturer                             | MVG                                                                     |
| Model                                    | SSE2                                                                    |
| Serial Number                            | 0123-EPGO-396                                                           |
| Product Condition (new / used)           | New                                                                     |
| Frequency Range of Probe                 | 0.15 GHz-7.5GHz                                                         |
| Resistance of Three Dipoles at Connector | Dipole 1: R1=0.232 MΩ<br>Dipole 2: R2=0.250 MΩ<br>Dipole 3: R3=0.248 MΩ |

## 2 PRODUCT DESCRIPTION

### 2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



**Figure 1 – MVG COMOSAR Dosimetric E field Probe**

|                                            |        |
|--------------------------------------------|--------|
| Probe Length                               | 330 mm |
| Length of Individual Dipoles               | 2 mm   |
| Maximum external diameter                  | 8 mm   |
| Probe Tip External Diameter                | 2.5 mm |
| Distance between dipoles / probe extremity | 1 mm   |

## 3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

### 3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.



### 3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

### 3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

### 3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and  $d_{be} + d_{step}$  along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/(\delta/2)})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

|                     |                                                                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $SAR_{uncertainty}$ | is the uncertainty in percent of the probe boundary effect                                                                                                                                           |
| $d_{be}$            | is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre                                                                                                |
| $\Delta_{step}$     | is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible |
| $\delta$            | is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;                                               |
| $\Delta SAR_{be}$   | in percent of SAR is the deviation between the measured SAR value, at the distance $d_{be}$ from the boundary, and the analytical SAR value.                                                         |

The measured worst case boundary effect  $SAR_{uncertainty}[\%]$  for scanning distances larger than 4mm is 1.0% Limit ,2%).

## 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

## 5 CALIBRATION RESULTS

| Ambient condition  |             |
|--------------------|-------------|
| Liquid Temperature | 20 +/- 1 °C |
| Lab Temperature    | 20 +/- 1 °C |
| Lab Humidity       | 30-70 %     |

### 5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

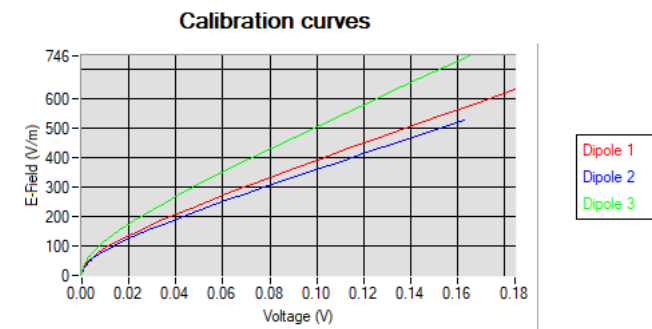

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

where

$V_i$ =voltage readings on the 3 channels of the probe

$DCP_i$ =diode compression point given below for the 3 channels of the probe

$Norm_i$ =dipole sensitivity given below for the 3 channels of the probe



| Normx dipole 1 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normy dipole 2 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normz dipole 3 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) |
|--------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|
| 1.27                                                   | 1.51                                                   | 0.77                                                   |

| DCP dipole 1 (mV) | DCP dipole 2 (mV) | DCP dipole 3 (mV) |
|-------------------|-------------------|-------------------|
| 106               | 104               | 104               |

## 5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$\text{ConvF} = \frac{E_{\text{liquid}}^2}{E_{\text{air}}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{\text{liquid}}^2 = \frac{\rho \text{ SAR}}{\sigma}$$

where

$\sigma$ =the conductivity of the liquid

$\rho$ =the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$\text{SAR} = c \frac{dT}{dt}$$

where

$c$ =the specific heat for the liquid

$dT/dt$ =the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$\text{SAR} = \frac{4P_W}{ab\delta} e^{-\frac{2z}{\delta}}$$

where

$a$ =the larger cross-sectional of the waveguide

$b$ =the smaller cross-sectional of the waveguide



$\delta$ =the skin depth for the liquid in the waveguide

$P_W$ =the power delivered to the liquid

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.

| Liquid | Frequency (MHz*) | ConvF |
|--------|------------------|-------|
| HL750  | 750              | 2.11  |
| BL750  | 750              | 2.19  |
| HL850  | 835              | 1.99  |
| BL850  | 835              | 2.14  |
| HL900  | 900              | 1.93  |
| BL900  | 900              | 2.18  |
| HL1800 | 1800             | 2.13  |
| BL1800 | 1800             | 2.30  |
| HL1900 | 1900             | 2.26  |
| BL1900 | 1900             | 2.35  |
| HL2000 | 2000             | 2.40  |
| BL2000 | 2000             | 2.53  |
| HL2450 | 2450             | 2.43  |
| BL2450 | 2450             | 2.66  |
| HL2600 | 2600             | 2.23  |
| BL2600 | 2600             | 2.35  |
| HL3300 | 3300             | 2.00  |
| BL3300 | 3300             | 1.79  |
| HL3900 | 3900             | 2.23  |
| BL3900 | 3900             | 2.17  |
| HL4200 | 4200             | 2.27  |
| BL4200 | 4200             | 2.25  |
| HL4600 | 4600             | 2.18  |
| BL4600 | 4600             | 2.12  |
| HL4900 | 4900             | 2.14  |
| BL4900 | 4900             | 2.13  |
| HL5200 | 5200             | 1.90  |
| BL5200 | 5200             | 1.73  |
| HL5400 | 5400             | 2.10  |
| BL5400 | 5400             | 1.81  |
| HL5600 | 5600             | 2.13  |
| BL5600 | 5600             | 1.98  |
| HL5800 | 5800             | 2.11  |
| BL5800 | 5800             | 1.85  |


(\*) Frequency validity is +/-50MHz below 600MHz, +/-100MHz from 600MHz to 6GHz and +/-500MHz above 6GHz

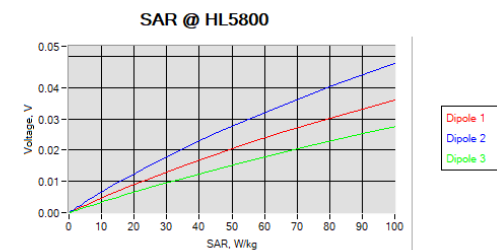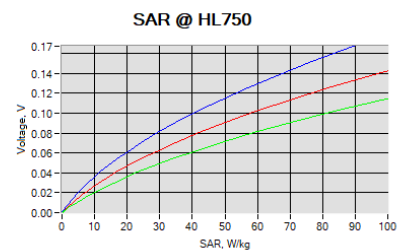



## 6 VERIFICATION RESULTS

The figures below represent the measured linearity and axial isotropy for this probe. The probe specification is  $\pm 0.2$  dB for linearity and  $\pm 0.15$  dB for axial isotropy.

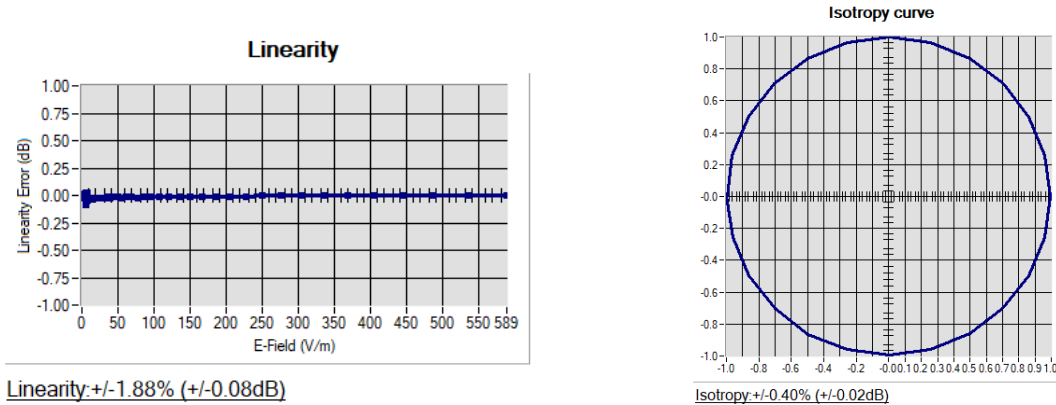

## 7 LIST OF EQUIPMENT

| Equipment Summary Sheet            |                         |                    |                                               |                                               |
|------------------------------------|-------------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description              | Manufacturer / Model    | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| CALIPROBE Test Bench               | Version 2               | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                   | Rohde & Schwarz ZVM     | 100203             | 08/2021                                       | 08/2024                                       |
| Network Analyzer                   | Agilent 8753ES          | MY40003210         | 10/2019                                       | 10/2023                                       |
| Network Analyzer – Calibration kit | HP 85033D               | 3423A08186         | 06/2021                                       | 06/2027                                       |
| Network Analyzer – Calibration kit | Rohde & Schwarz ZV-Z235 | 101223             | 07/2022                                       | 07/2025                                       |
| Multimeter                         | Keithley 2000           | 1160271            | 02/2020                                       | 02/2023                                       |
| Signal Generator                   | Rohde & Schwarz SMB     | 106589             | 03/2022                                       | 03/2025                                       |
| Amplifier                          | MVG                     | MODU-023-C-0002    | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                        | NI-USB 5680             | 170100013          | 06/2021                                       | 06/2024                                       |
| Power Meter                        | NI-USB 5680             | 170100013          | 06/2021                                       | 06/2024                                       |

|                               |                       |                            |                                               |                                               |
|-------------------------------|-----------------------|----------------------------|-----------------------------------------------|-----------------------------------------------|
| Directional Coupler           | Krytar 158020         | 131467                     | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Fluoroptic Thermometer        | LumaSense Luxtron 812 | 94264                      | 09/2022                                       | 09/2025                                       |
| Coaxial cell                  | MVG                   | SN 32/16<br>COAXCELL_1     | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                     | MVG                   | SN 32/16 WG2_1             | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_0G600_1  | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                     | MVG                   | SN 32/16 WG4_1             | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_0G900_1  | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                     | MVG                   | SN 32/16 WG6_1             | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_1G500_1  | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                     | MVG                   | SN 32/16 WG8_1             | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_1G800B_1 | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_1G800H_1 | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                     | MVG                   | SN 32/16 WG10_1            | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_3G500_1  | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                     | MVG                   | SN 32/16 WG12_1            | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_5G000_1  | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide                     | MVG                   | SN 32/16 WG14_1            | Validated. No cal required.                   | Validated. No cal required.                   |
| Liquid transition             | MVG                   | SN 32/16<br>WGLIQ_7G000_1  | Validated. No cal required.                   | Validated. No cal required.                   |
| Temperature / Humidity Sensor | Testo 184 H1          | 44225320                   | 06/2021                                       | 06/2024                                       |