


# AtomS3 Quick Start.


Step 1 - Goto [https://docs.m5stack.com/en/quick\\_start/m5core/uiflow](https://docs.m5stack.com/en/quick_start/m5core/uiflow) and download M5Burner.

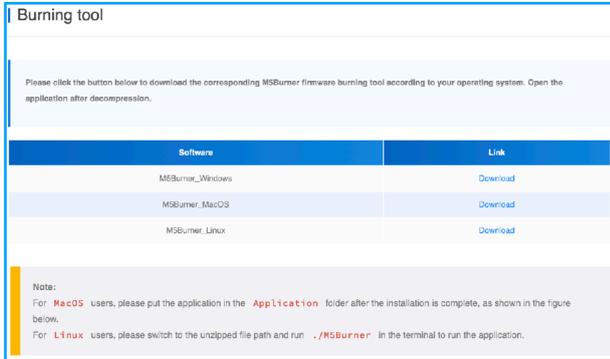

Step 2 - Place M5Burner in suitable location.

Step 3 - Connect Atom S3

Step 4 - Open M5Burner and click on Atom S3 on the right.

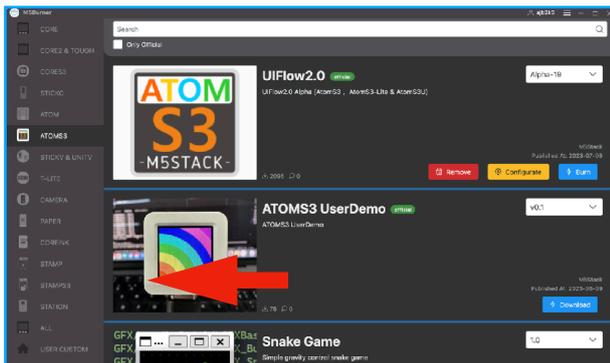


Step 5 - Scroll through the list of Firmwares and example and click Download to save them to the computer.

Step 6 - Press and hold button on side of AtomS3 for a few seconds until a green led lights up under the button.



Step 7 - Click the **Burn** to open the burn window and select the port that appeared when the green LED came on.

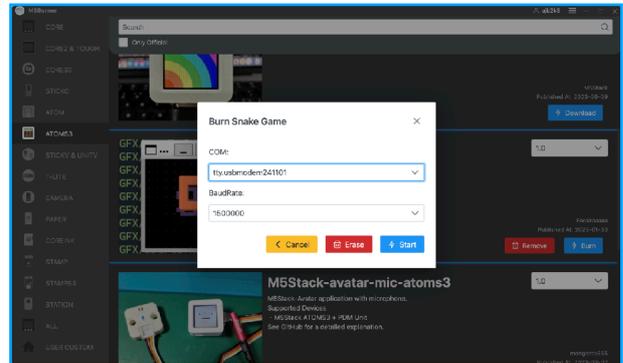

Step 8 - Click **Erase** to remove the existing code or firmware.

Step 9 - When complete, click **Start** to Burn new firmware.

Step 10 - Press the reset button once to reset the AtomS3 and run the firmware.

