


Unit PoE-P4 Restore Factory Firmware

Factory Firmware

When the device works abnormally, you can try reflashing the factory firmware to check whether there is a hardware fault. Refer to the following tutorial. Use the M5Burner firmware flashing tool to flash the factory firmware to the device.


1. Preparation

- Refer to the [M5Burner tutorial](#) to complete the download of the flashing tool, and refer to the image below to download the corresponding firmware.

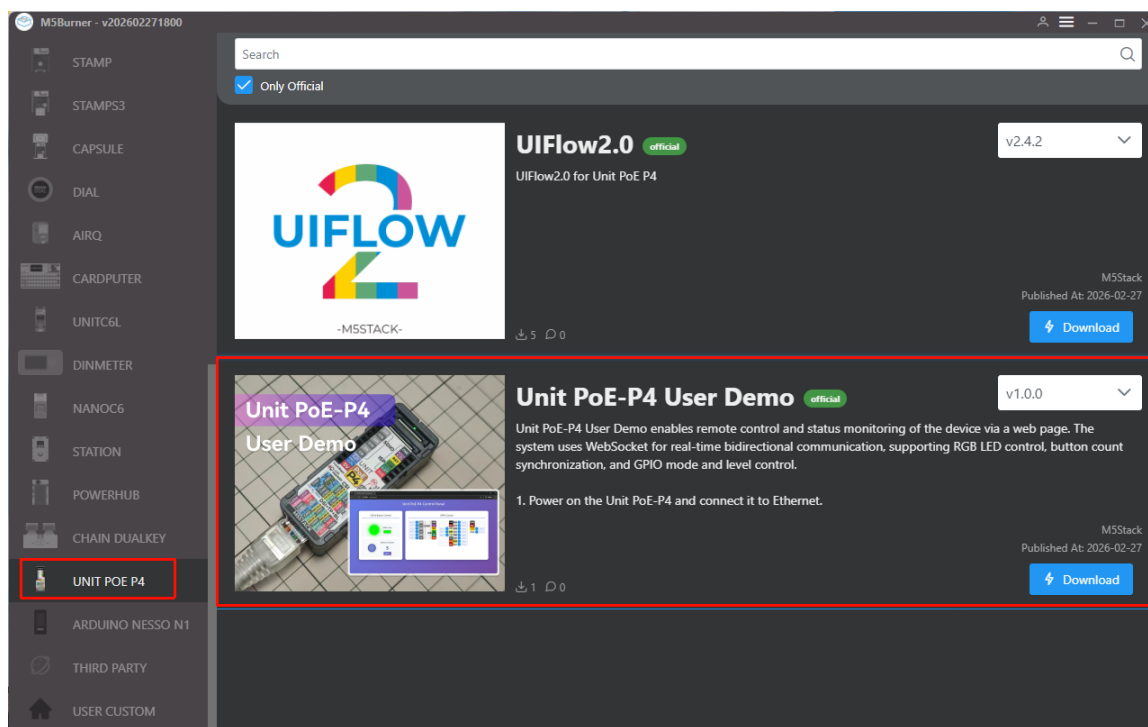


2. Download Mode

- Press and hold the reset button (about 2 seconds) until the internal green LED lights up, then release it. The device will enter download mode and wait for flashing.

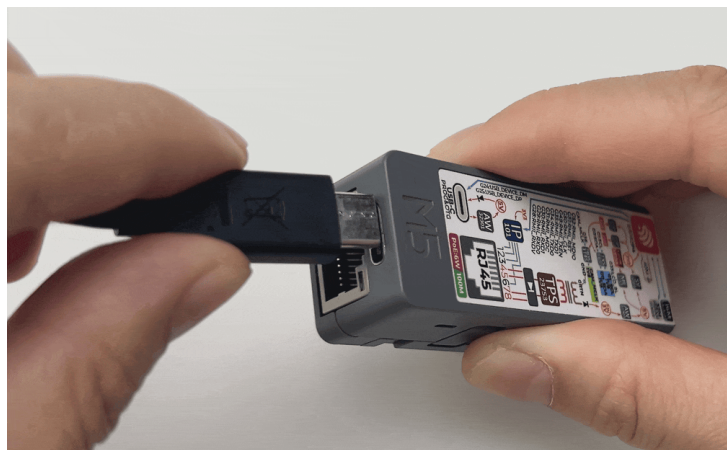


3. Port Selection

Connect the device to the computer via a USB cable. After the device enters download mode, you can select the corresponding device port in M5Burner.

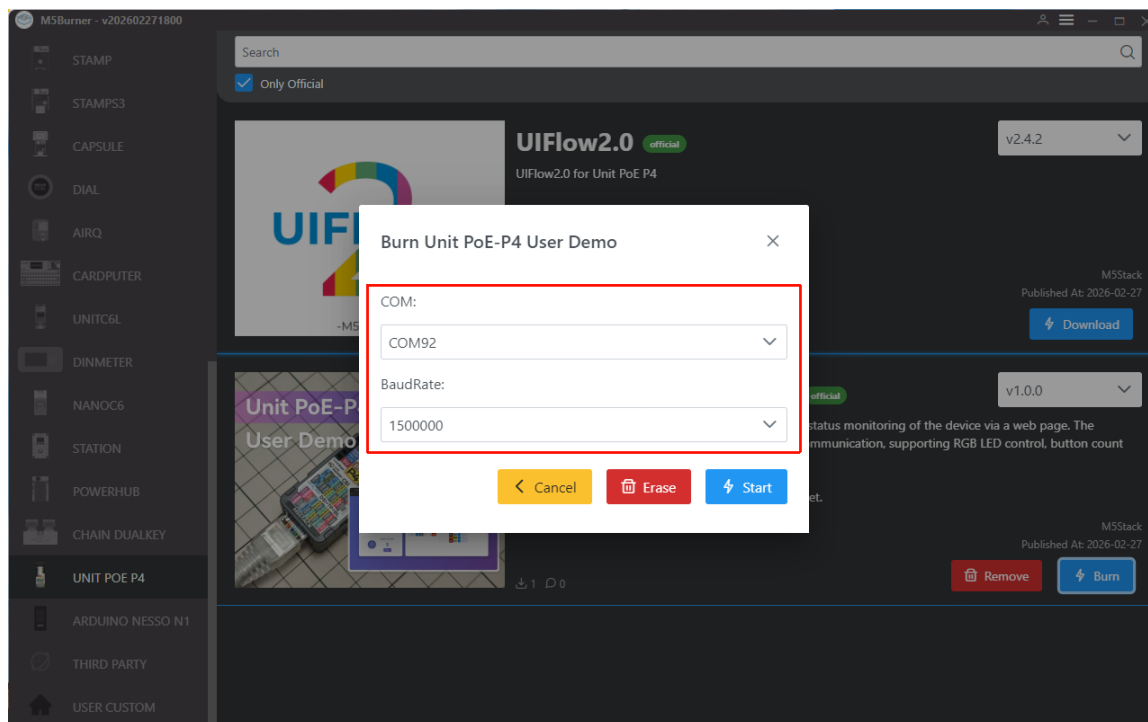


4. Firmware Flashing

1. Click **Erase** to erase old data.

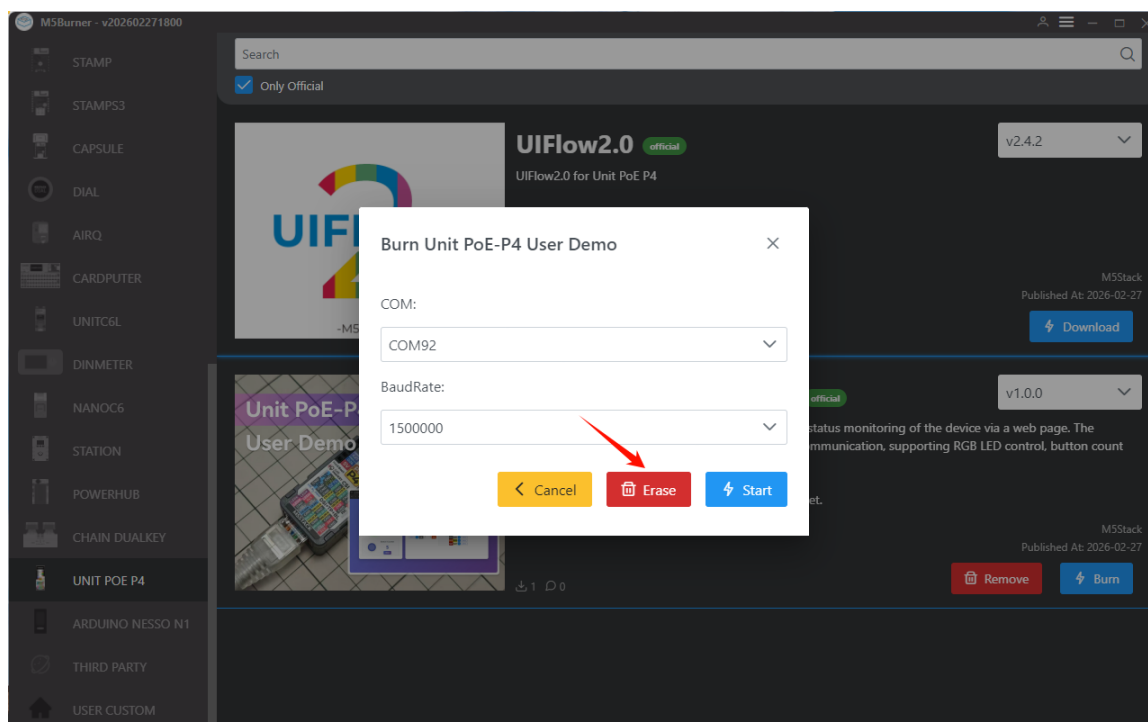

2. Click **Start** to begin flashing.

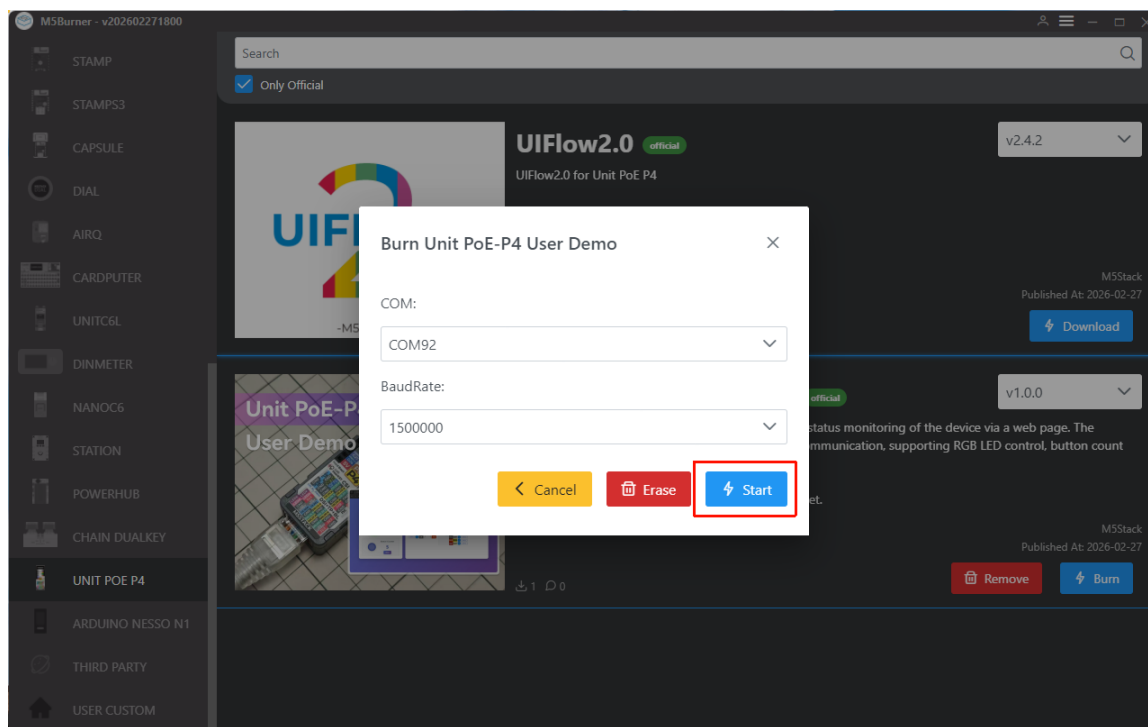

After flashing is completed, the following message will be displayed:

